
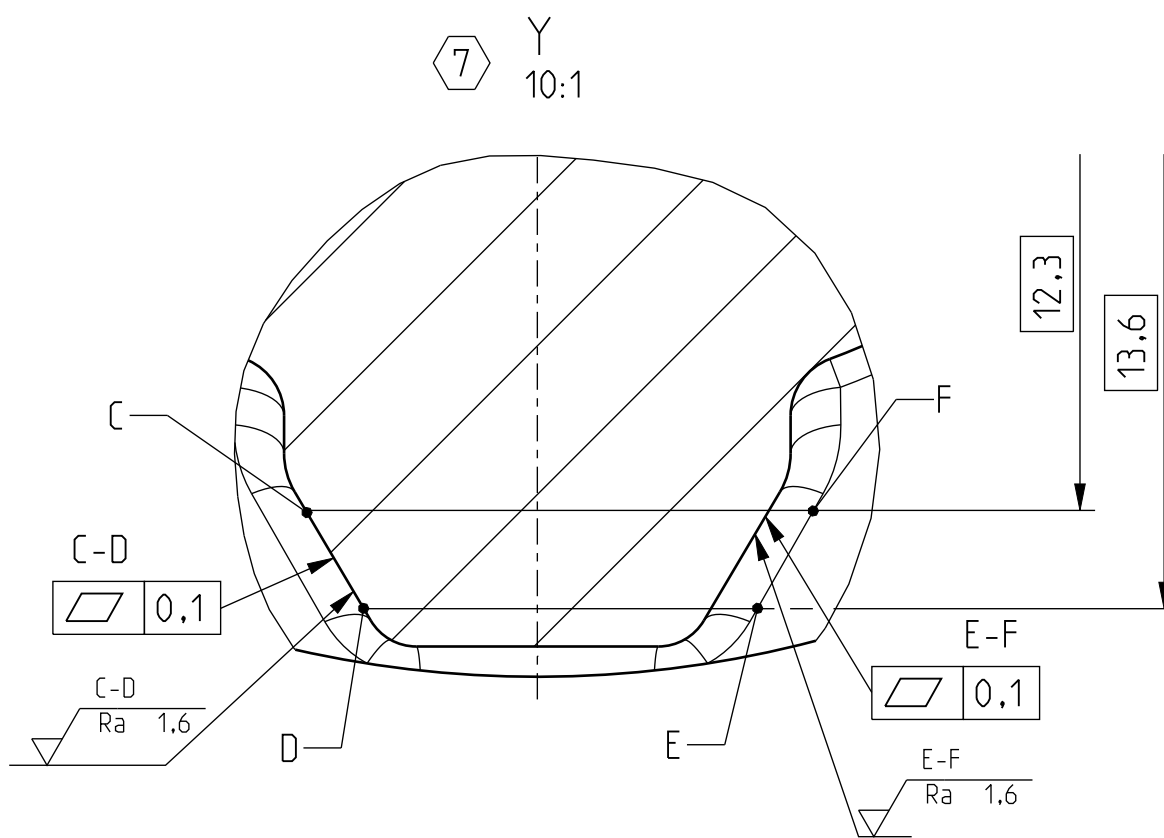
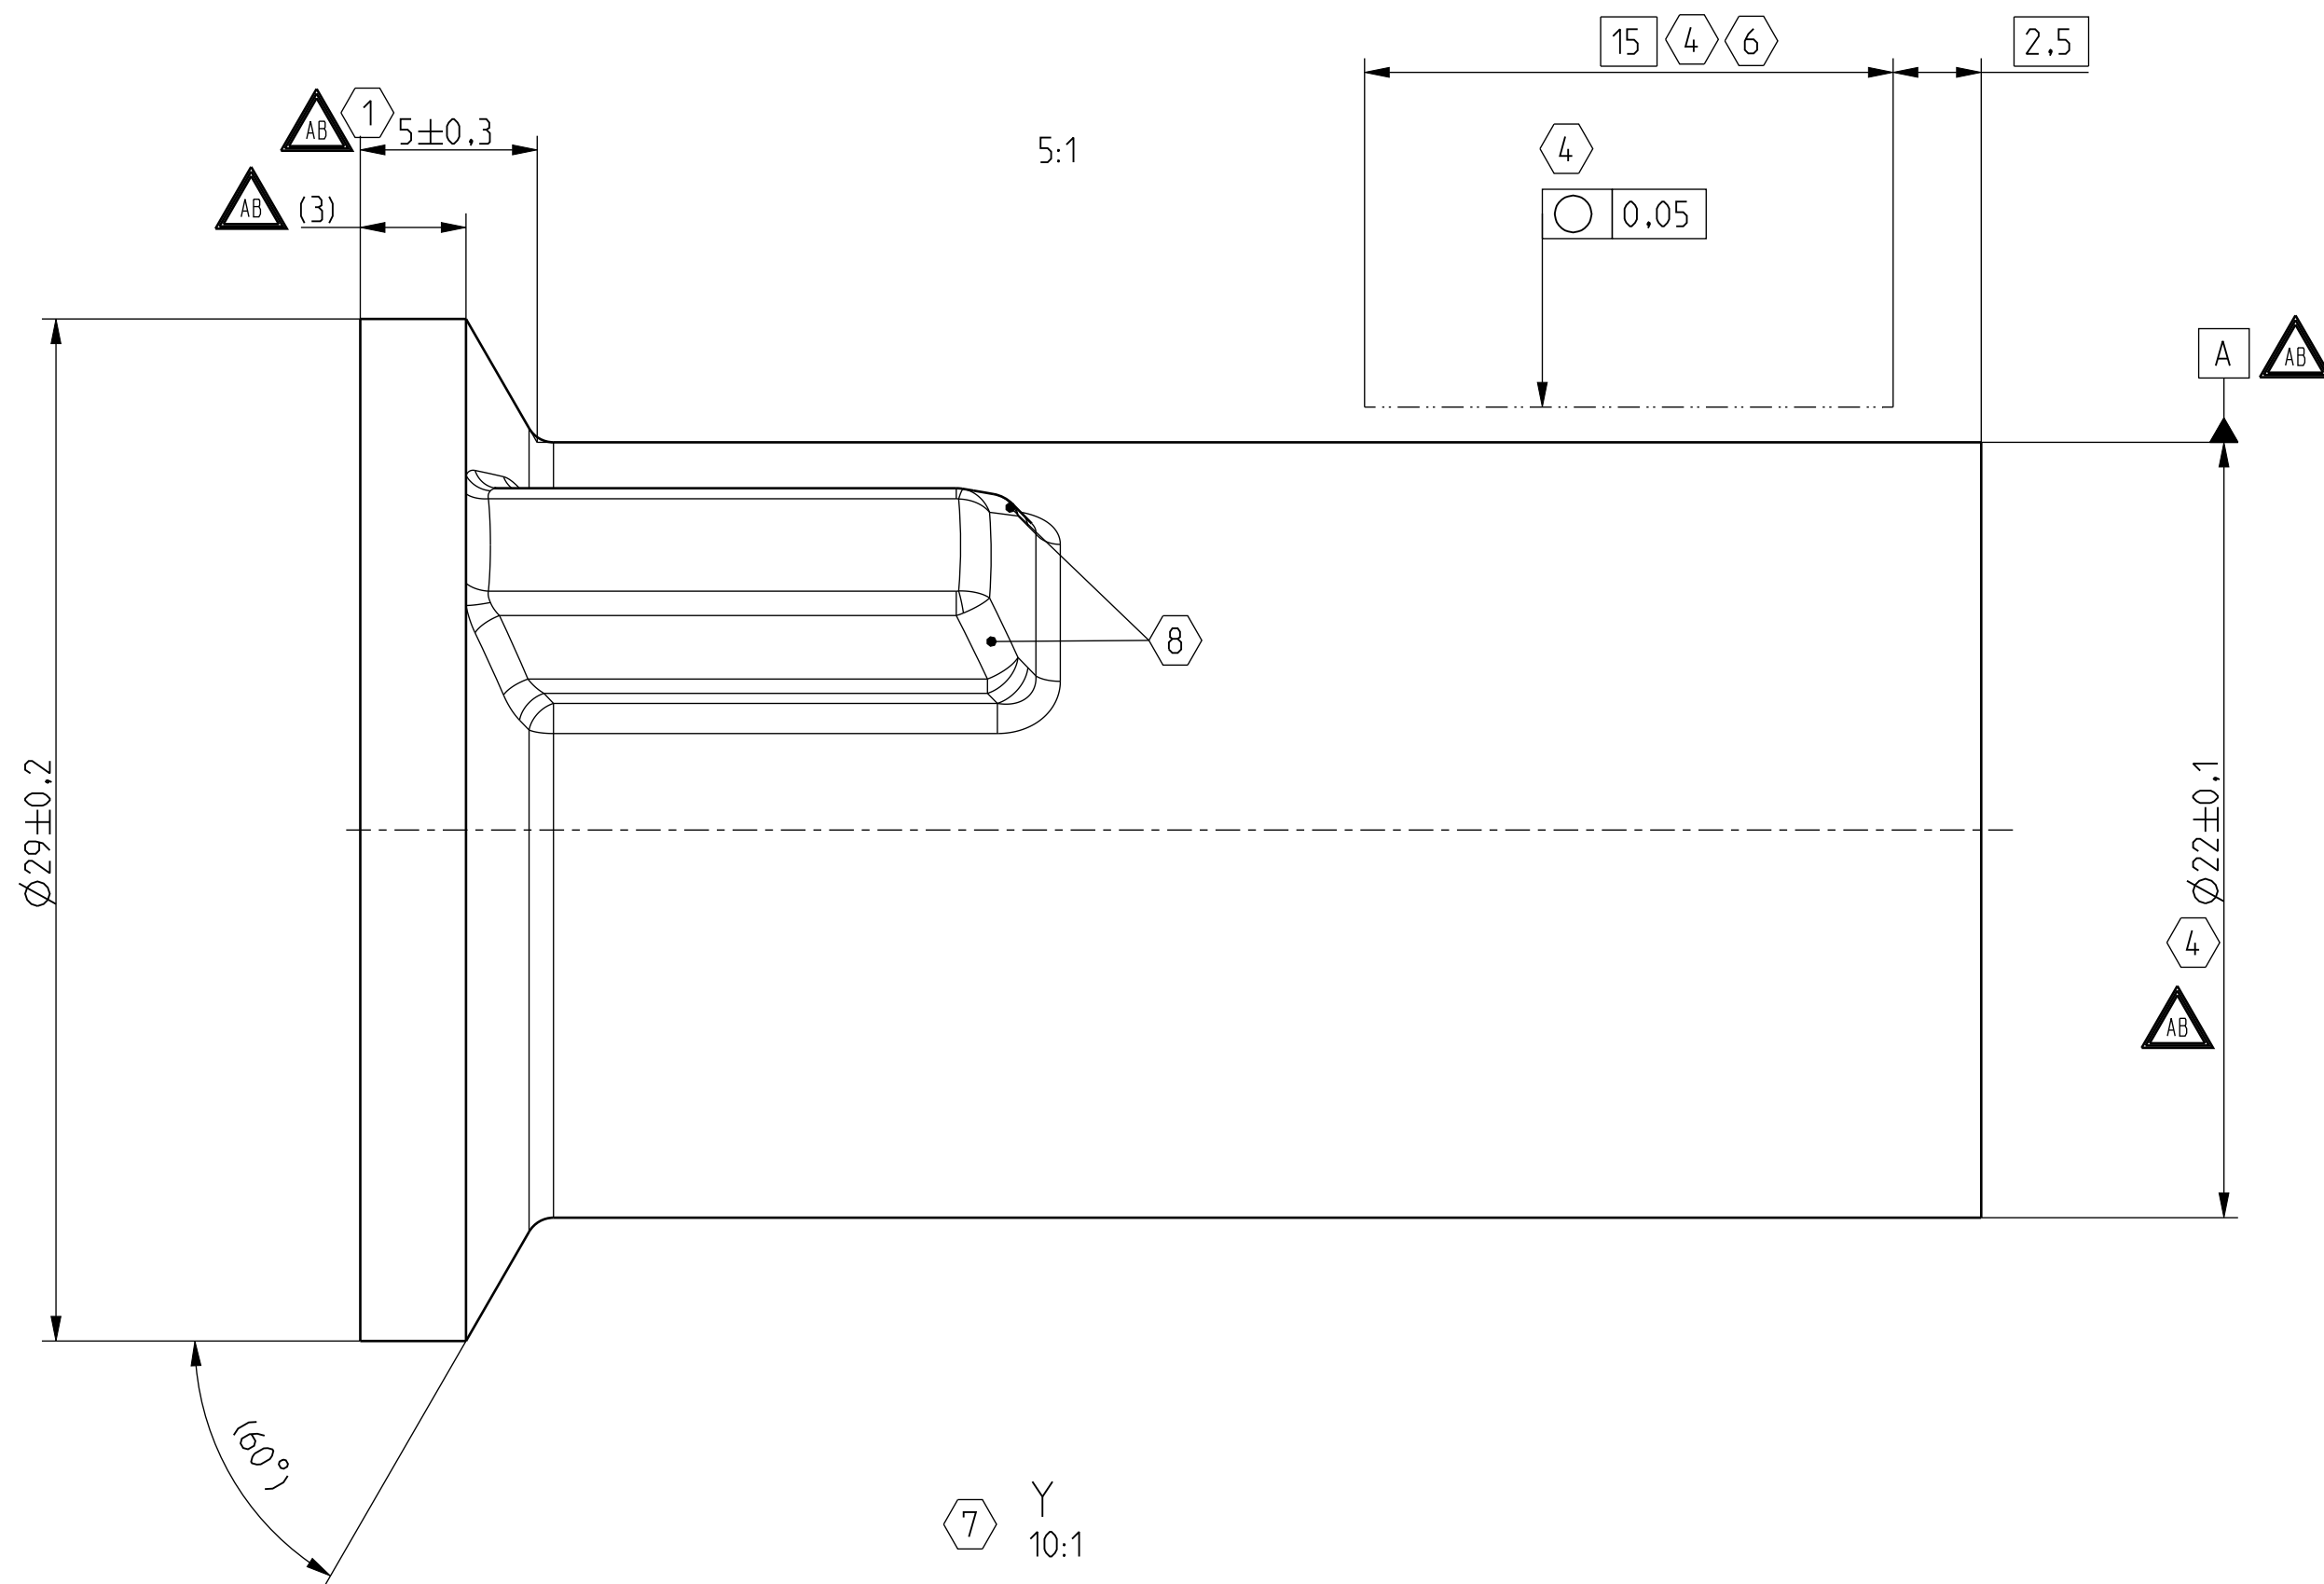
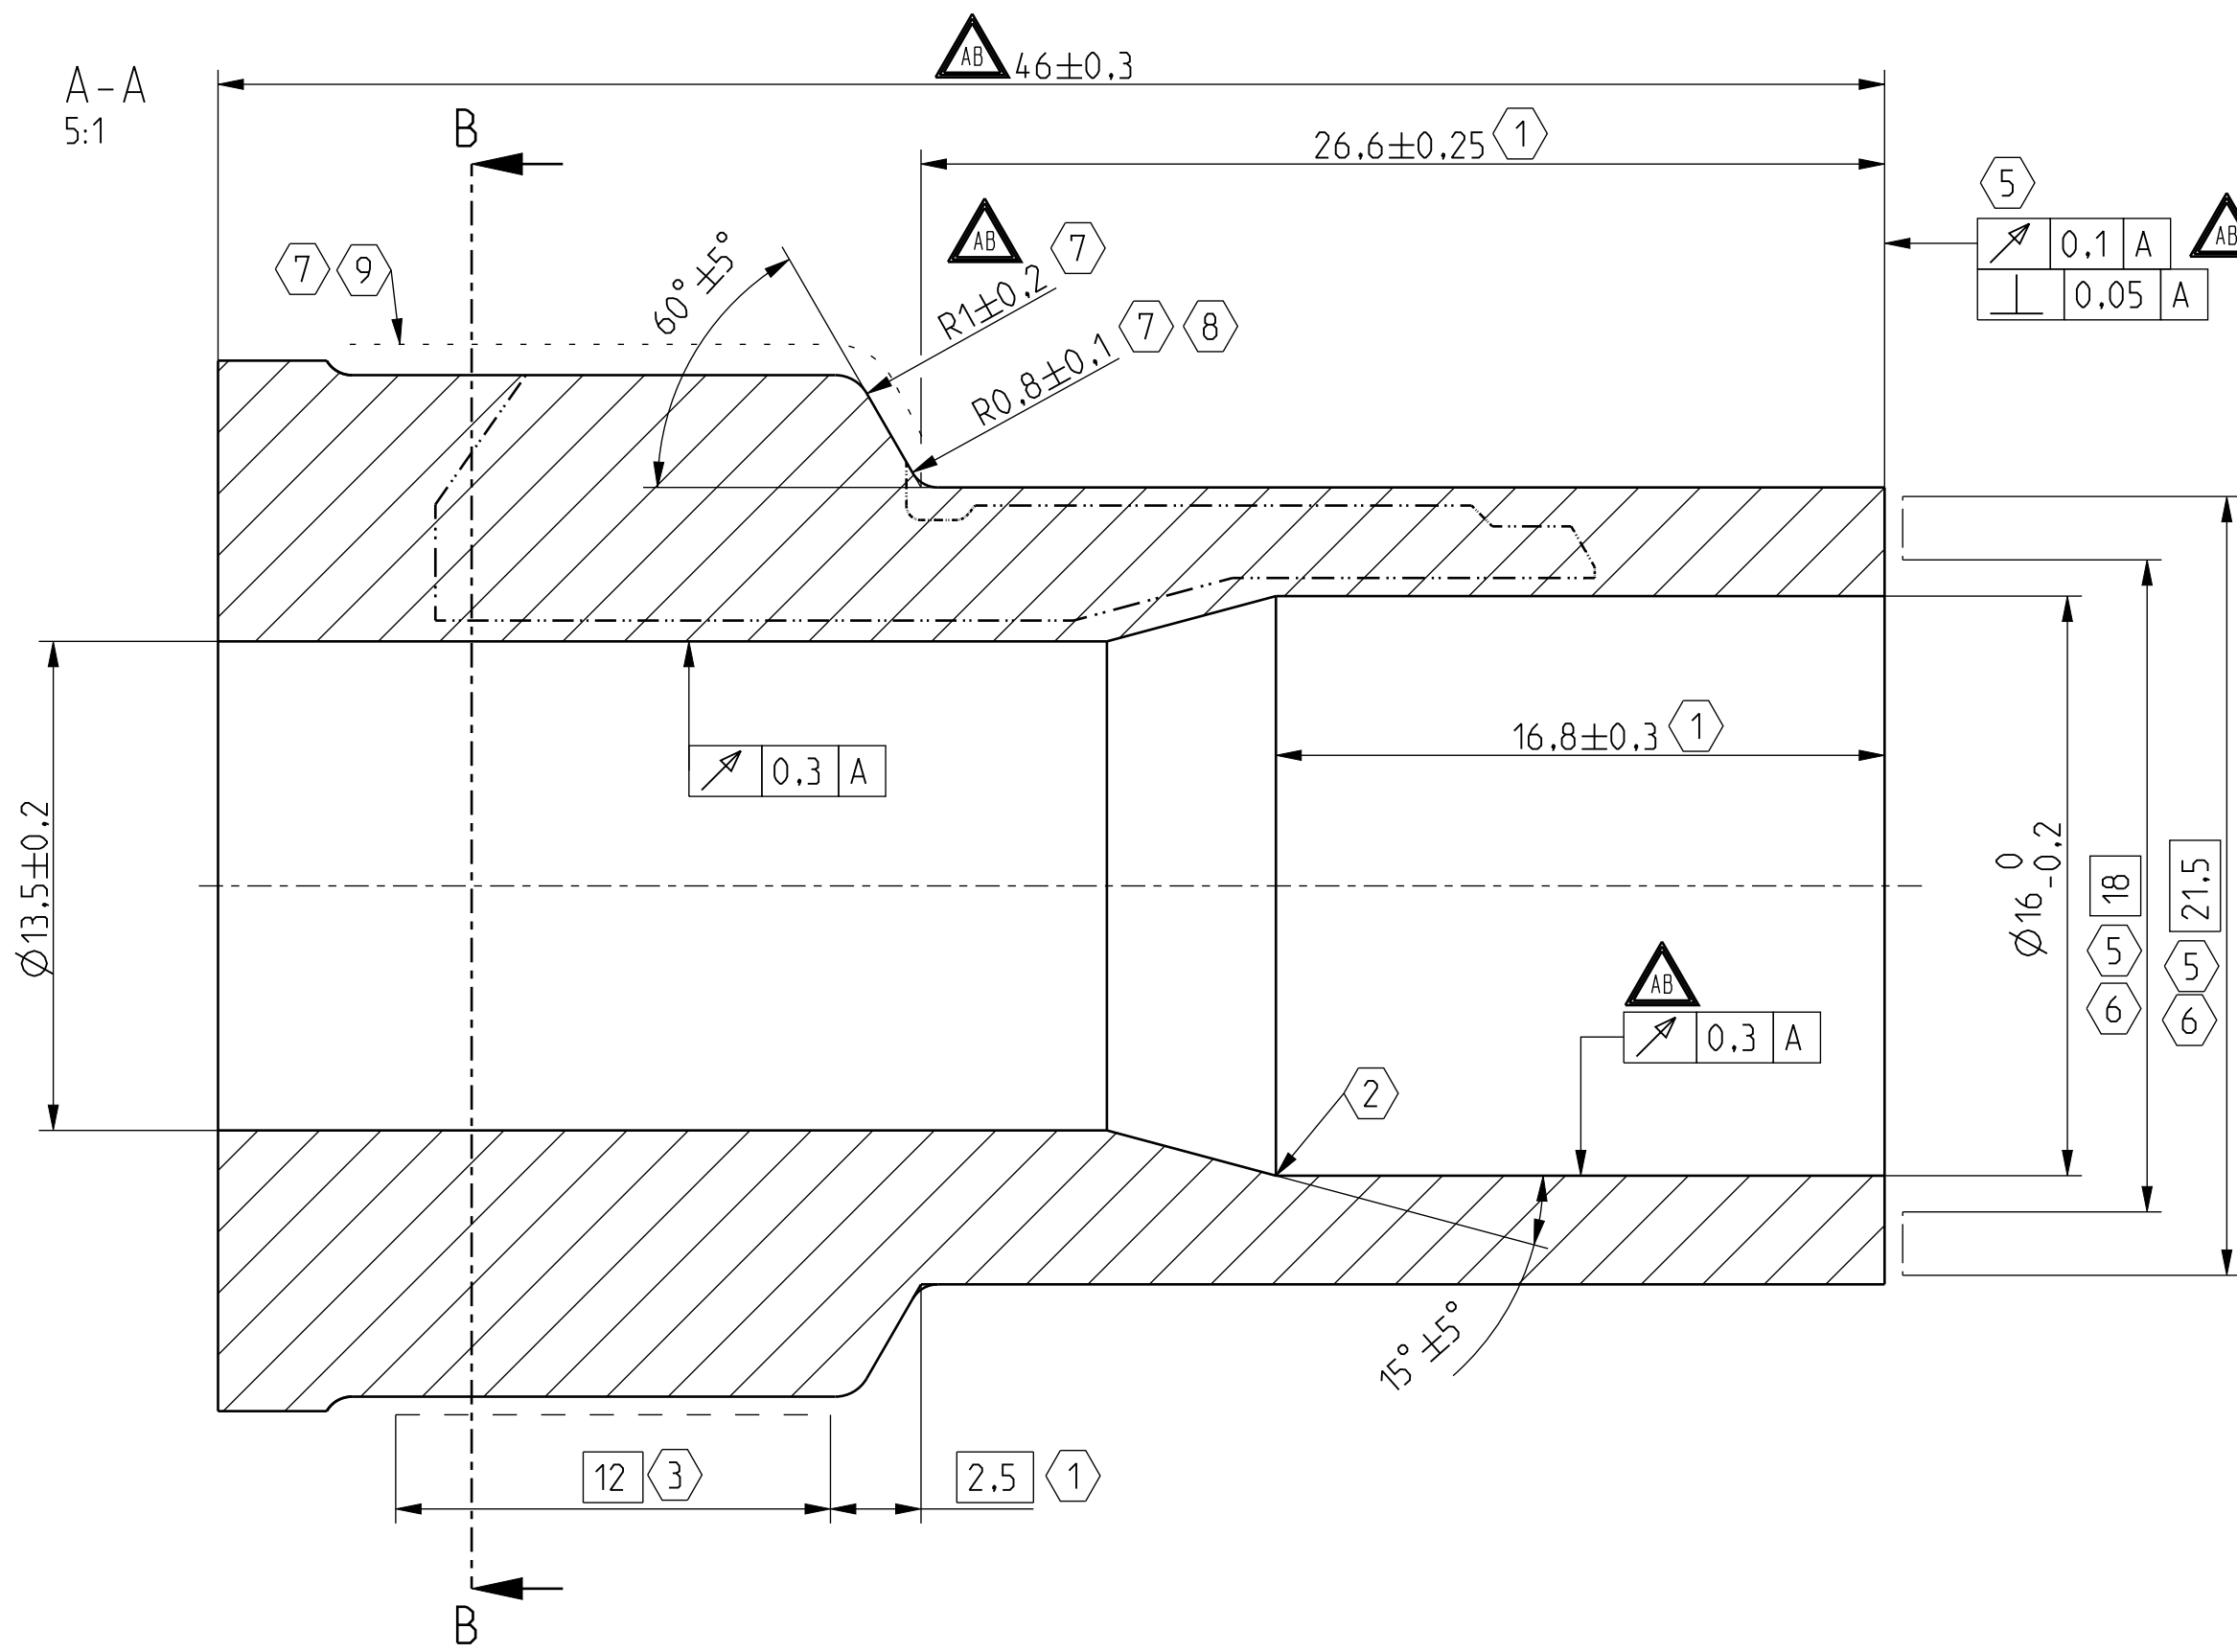
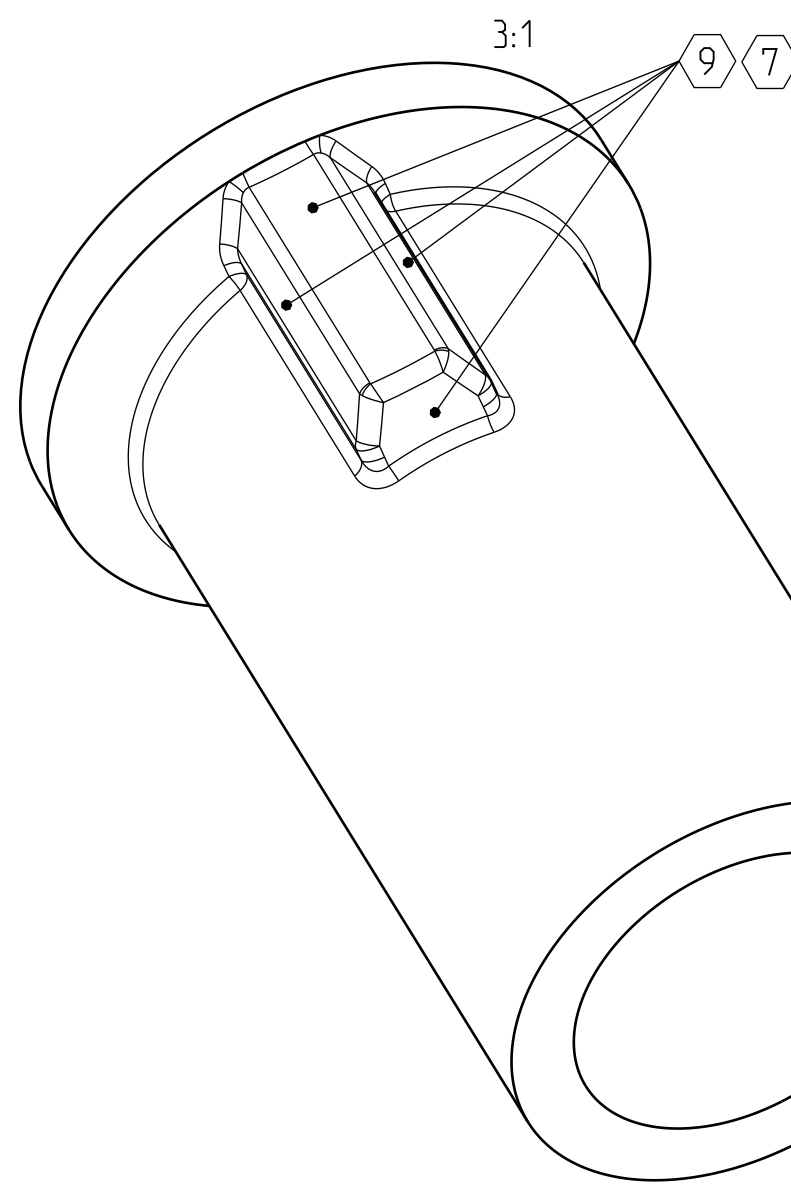
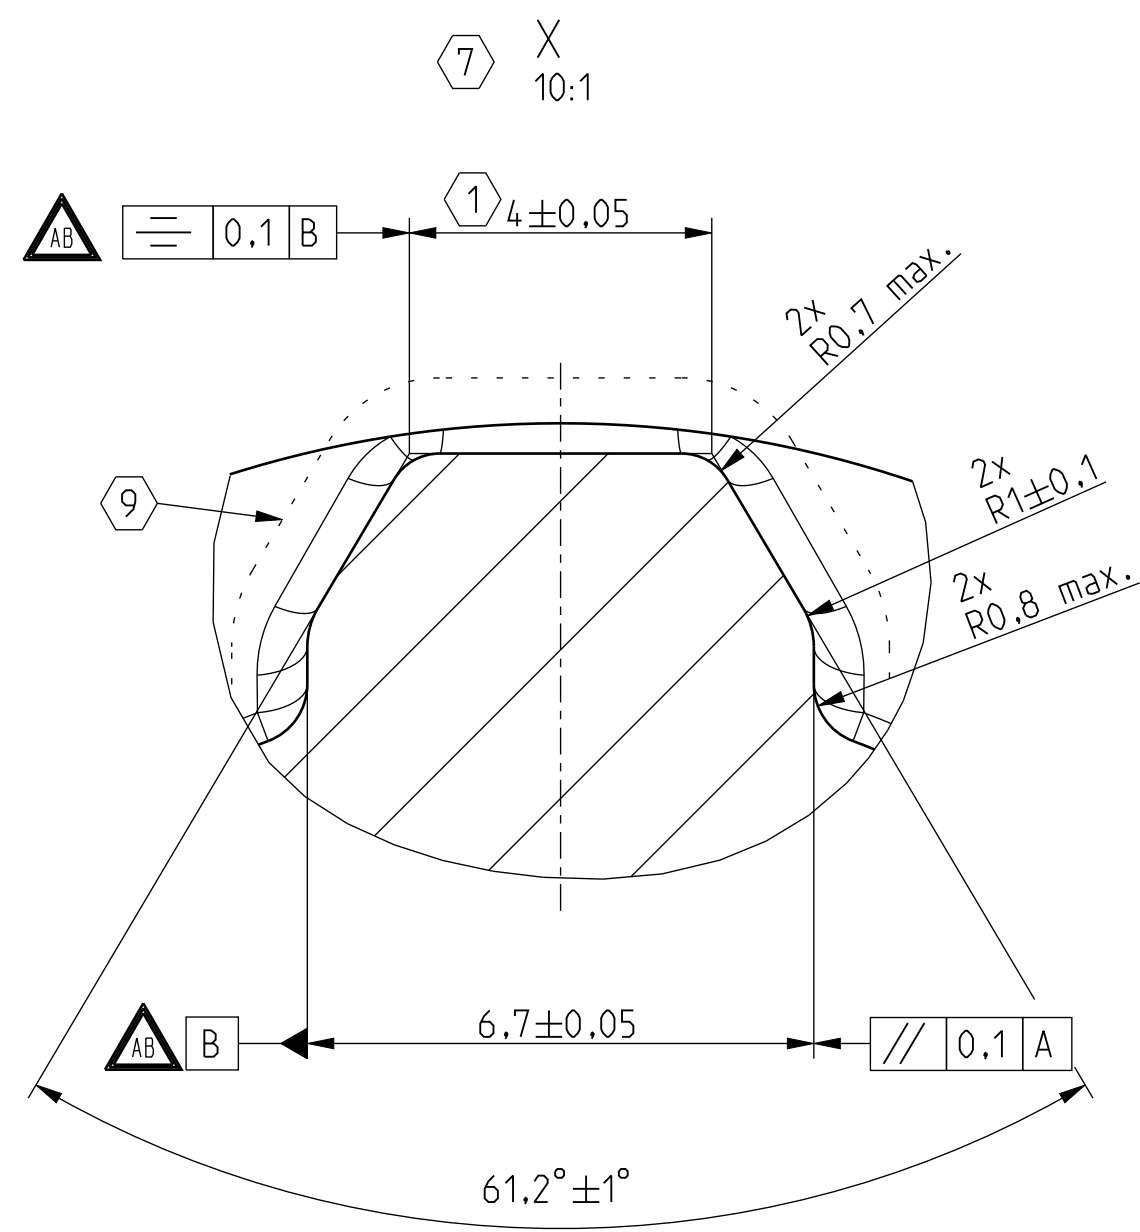


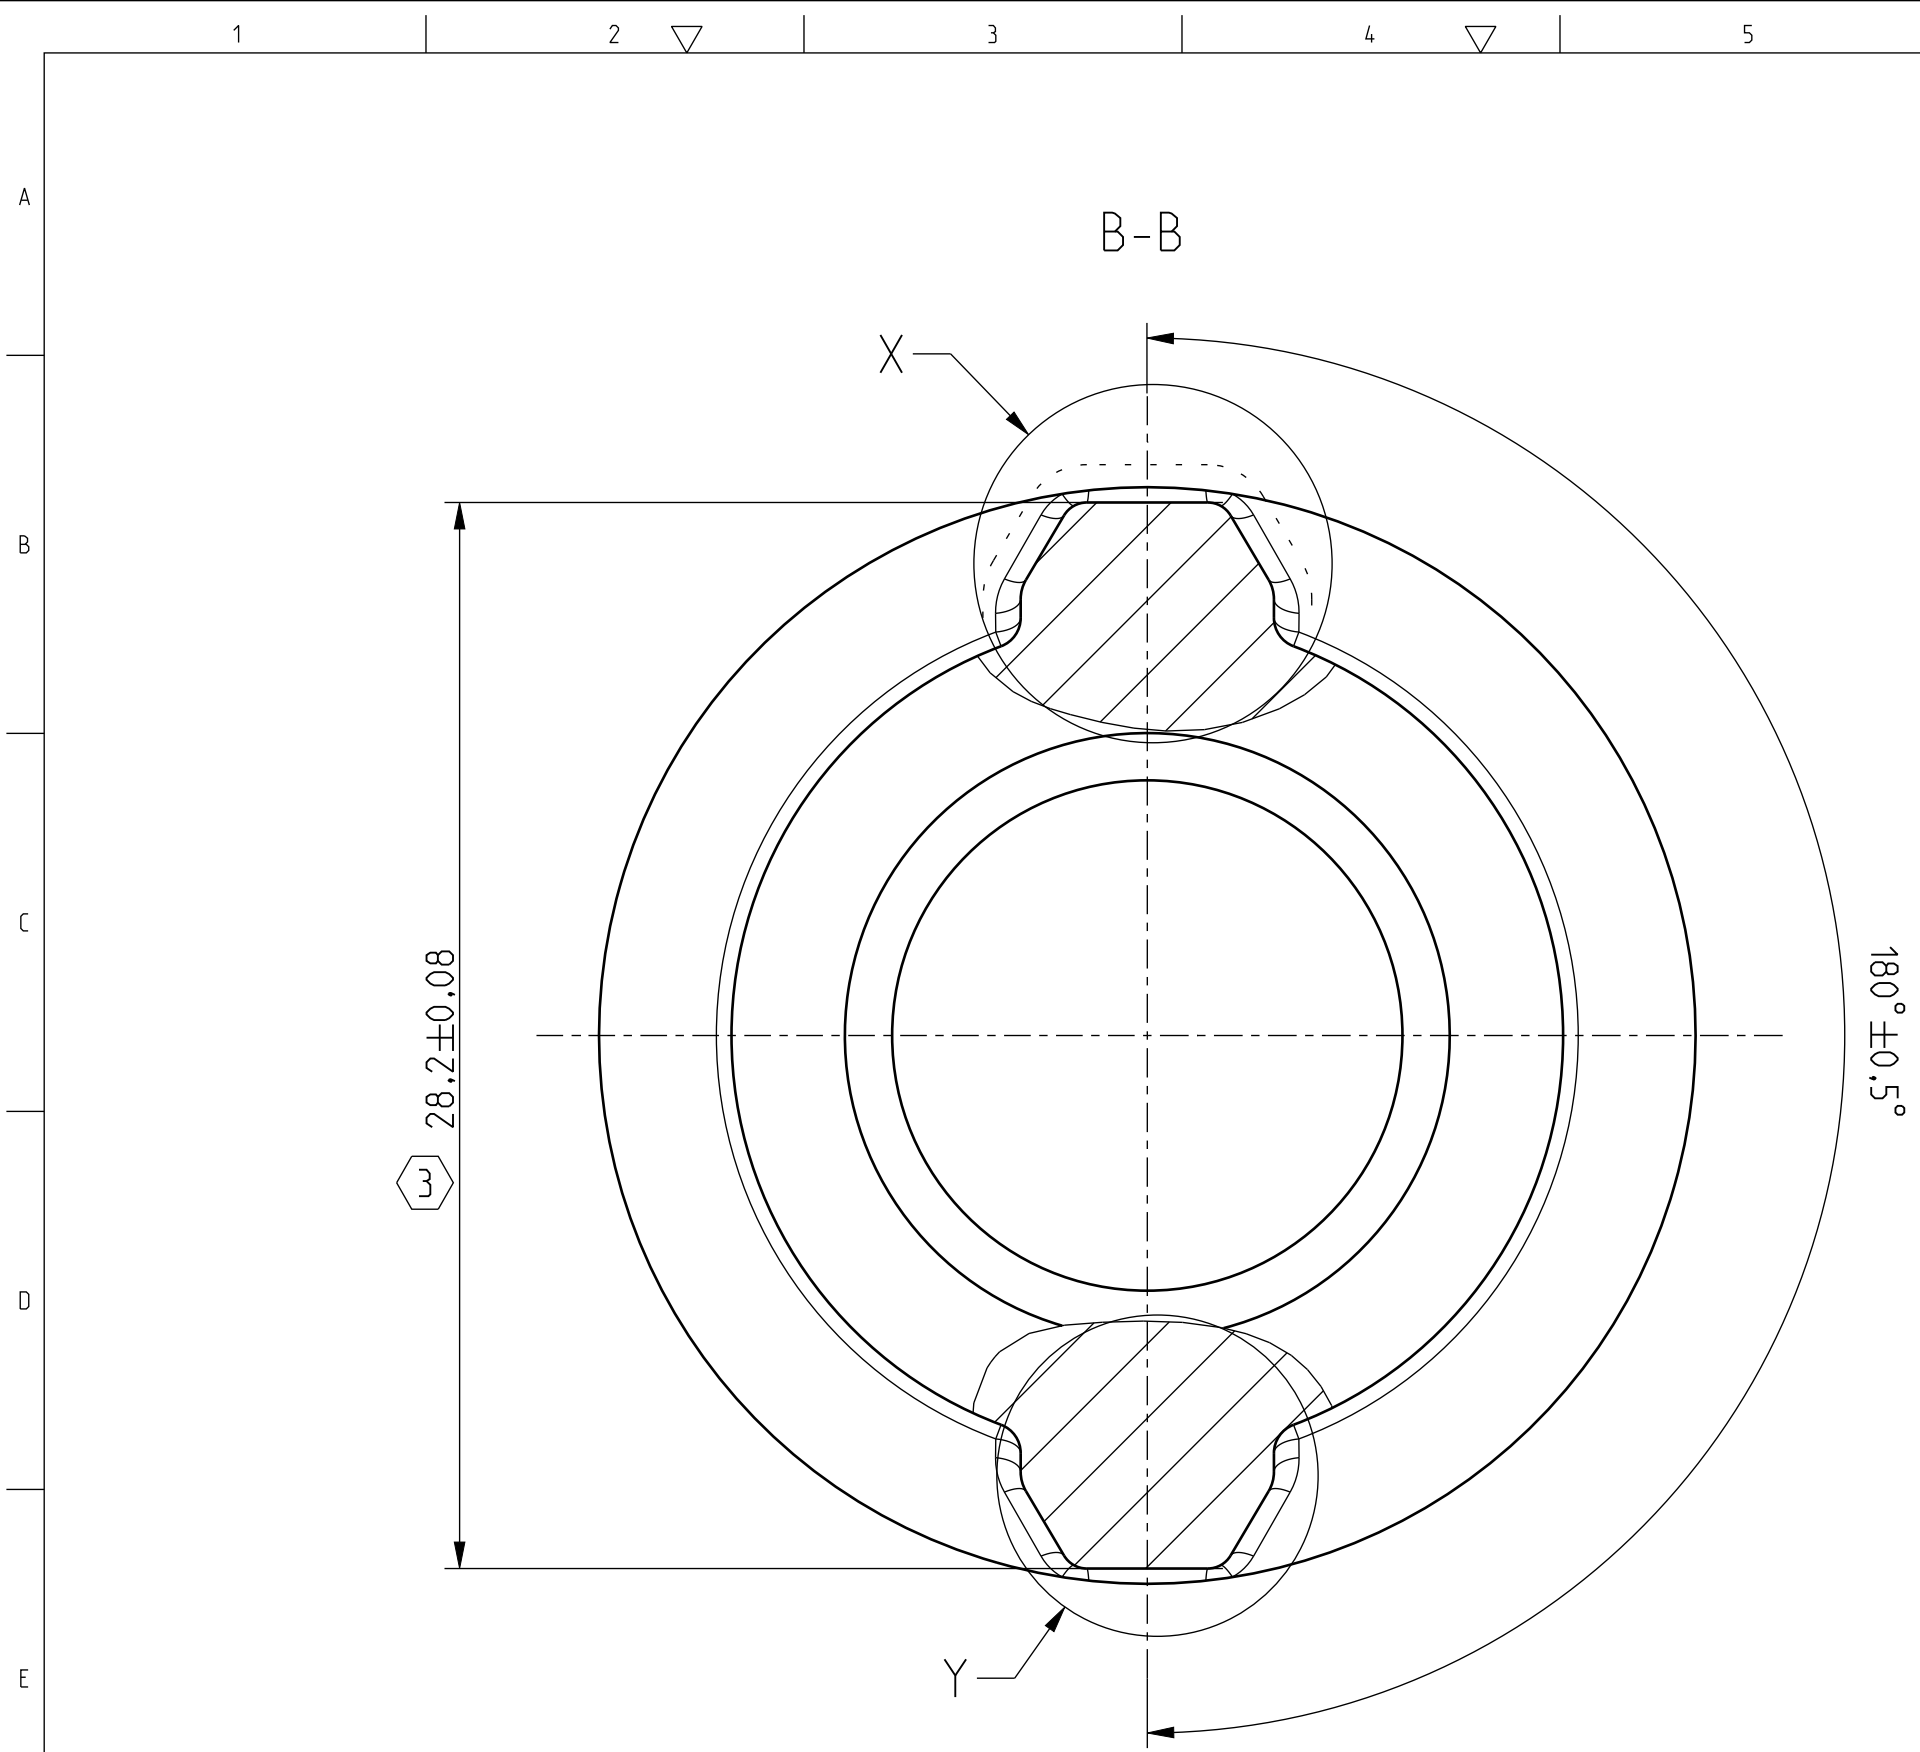

Restricted substances according to S 132030-1	
Proposal supplier drawing	
Brake component	
SC	Classification of characteristics according to S 102012-1
material 16MnCr5 K+GKZ+LG acc. to S 130284	SC

- 1 Intersection point
 - 2 manufacturing contour permissible
 - 3 Area to meet dimension and tolerance in B-B
 - 4 Measuring area
 - 5 Measuring area
 - 6 Clamping contact area in soft machining process
 - 7 each boss
 - 8 sharp edge is not possible
 - 9 Clamping marks, impact marks, rust or other surface imperfections are not permitted
- Free of cracks
- Delivery condition is without phosphate layer
- Cleanliness class acc. to S 252001-1: SKK 3A
Surface: 63.5 cm²
- Preserved

Add. Data / 추가정보			
Item / 자재코드		Ref. No.	Designation / 명칭번호
Tolerancing ISO 8015 제도통칙			
Version AB	Date 2026-05-07	Modification description / 개정기사 - Tolerances were increased for production	
Prev ver 구버전 AA	Modif. No. 개정번호 C218747	- Change : ø22±0.15 → ø22±0.1 for clamping, Width : 46.5 → 46	
Scale 척도 1:1		Description / 분류 Ball screw nut	Prep. by / 설계자 Ji Eun Jo
General tolerances 표기외공차 -		Additional description / 상세분류	Checked by / 검토자 Yong Su Kim
Mass approx. / 중량 약 89.91 g		Mater., semi-finished prod. / 반제품	
Sheet 페이지 1 / 1	Size 크기 A1	Proposal supplier drawing 공급업체 제안 도면	Document / 도면번호 EDS F-627894.15-0029-C04 X30