



材质：DC04
表色：镀锌5um， 72小时盐雾测试无红锈
数量：140000千件
要求：提供100个样品，告知费用PPAP3
木箱装120X80X70
(含底座，高度不要超)

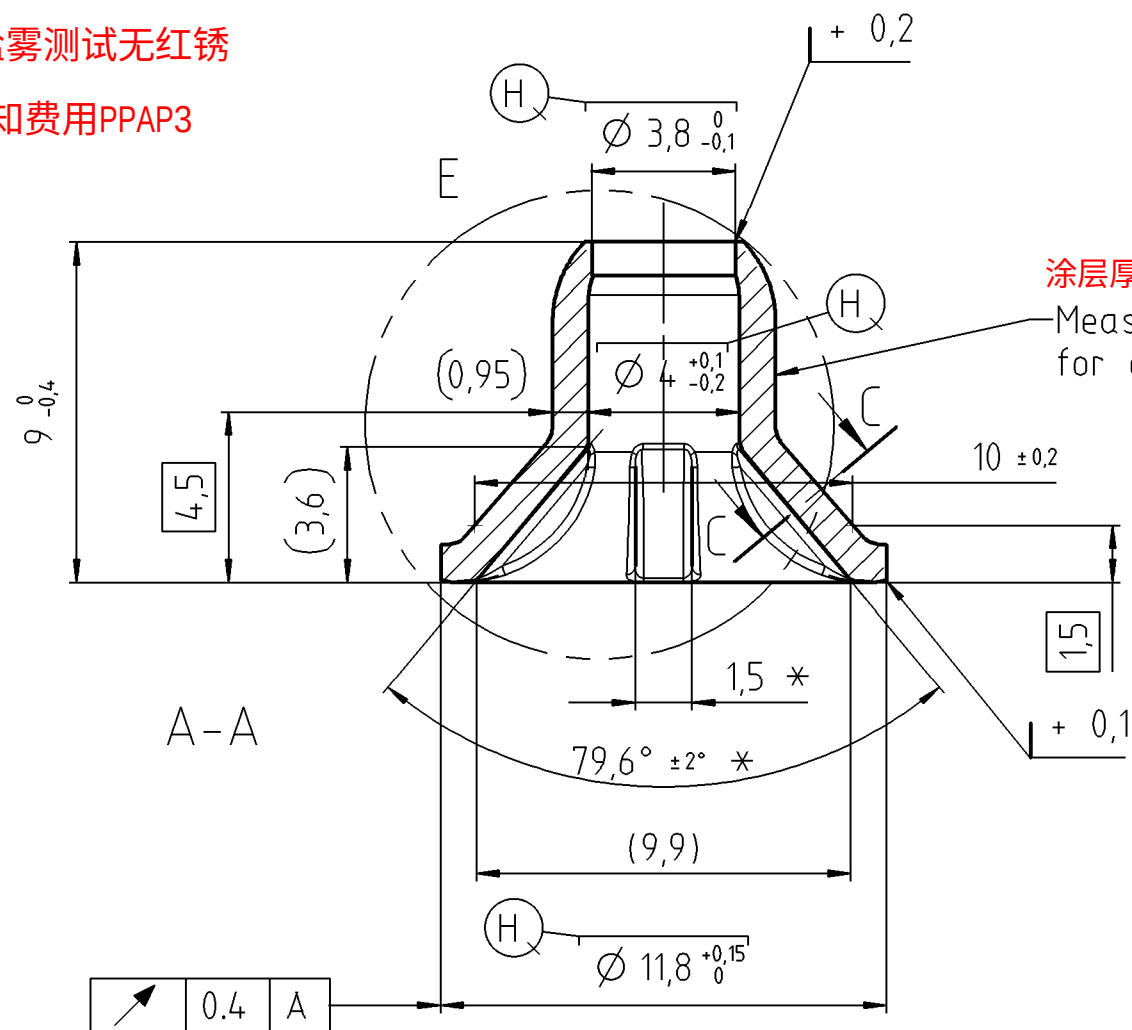

A-A

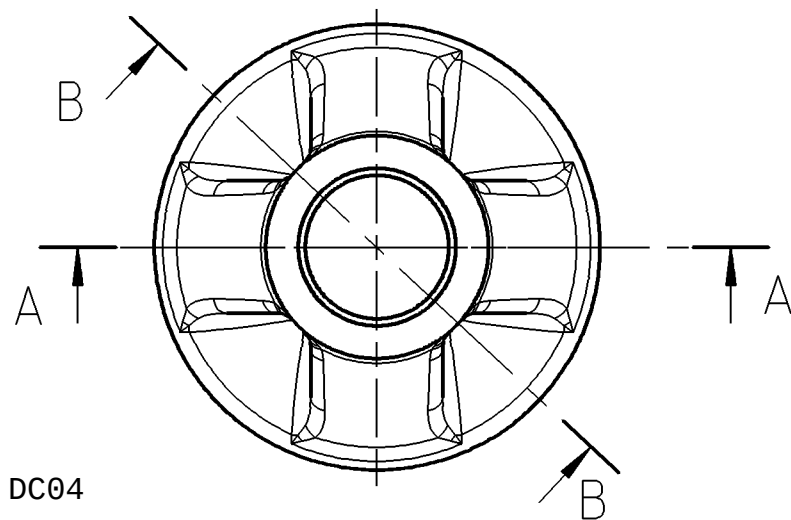

Material: EN 10130 DC04


DIN 50961-Fe/Zn5/A, B or C

✓ dull or bright
min. 72 h in neutral salt
spray test without red rust


涂层厚度测量点

Measuring point
for coating thickness

reduced wall
thickness allowed

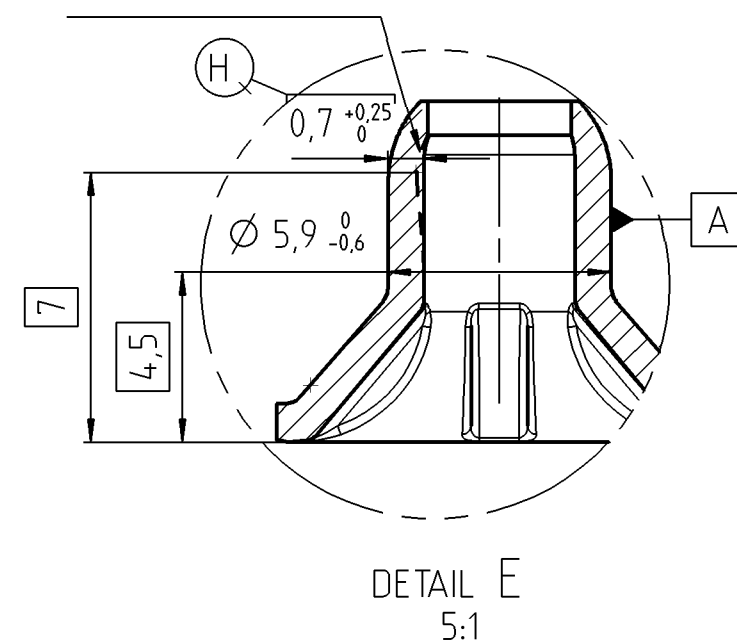


DETAIL E
5:1

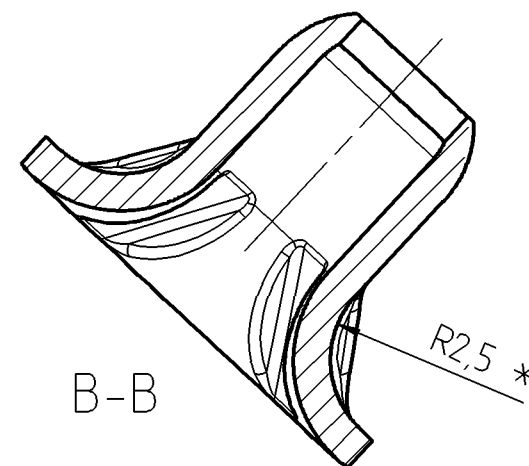

* Dimensions to be measured on the tool

原材料厚度公差
Raw material thickness:
1 ± 0,035 mm



M 2:1

Tolerierung ISO 14405 (E) / Allgmeintoleranzen ISO 2768 - mK
Toleration ISO 14405 (E) / General tolerances ISO 2768 - mK